

SWING HANDLE GEAR BOX

109


IP 65



LH/RH



RoHS

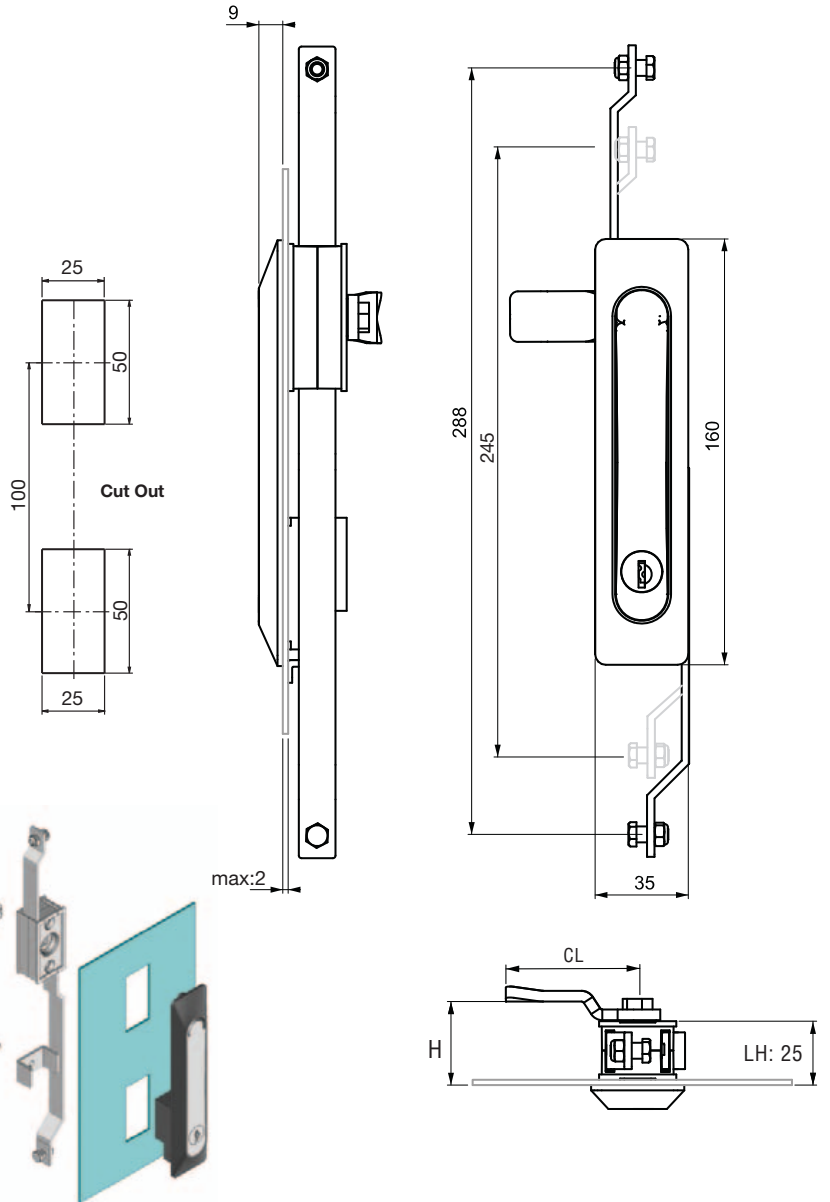


- Ultra thin external profile, just 9 mm, to give flush appearance.
- Spring loaded, slam action swing handle.

APPLICATIONS

Electric panels, machinery covers, rack cabinets

MATERIAL

BODY : PA6 GFR 30
 MECHANISM: Zamak DIN-EN 1774-ZnAl4Cu1
 HANDLE : Zamak DIN-EN 1774-ZnAl4Cu1
 CAM : Steel
 SEAL : Polyurethane

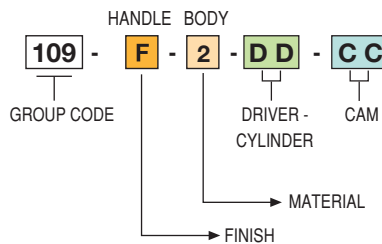

MATERIAL	M
Plastic (polyamide)	2
FINISH	F
Chrome	1
Black Coated	2

HIGH SECURITY CYLINDER	
Keyed alike	Keyed differ
20	21

DRIVERS		
5 mm Double bit	8 mm Square	9 mm Triangular
15	28	39

- For cams please check page: 88
- For rods please check page: 90 - 96
- For keys please check page: 98 - 99

Cylinder	SPECIFICATIONS	DD
	Stainless steel dust cap (Keyed alike)	03
	Stainless steel dust cap (Keyed differ)	32
	Master System	04
	Euro key (5333)	05