

SWING HANDLE GEAR BOX




309

Rod latch system
1-2



Small Version

- IP 65
- LH/RH
- RoHS

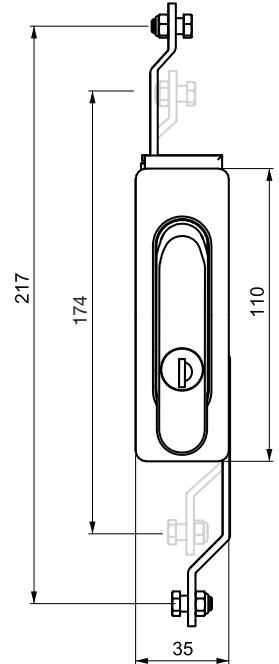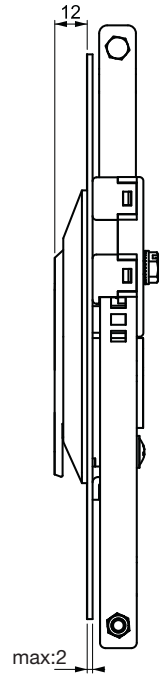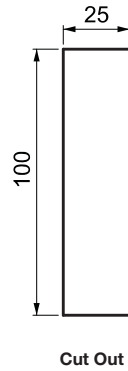


- Swing handle can be located outside gasketing.
- A special gearbox is used.
- Provides 3 point locking.
- 25 mm x 100 mm cut out.

APPLICATIONS



Electric panels, machinery covers, rack cabinets

MATERIAL

BODY : Polyamide DIN-EN ISO 1043-1 PA6 GFR 30
 MECHANISM : PA66
 HANDLE : Zamak DIN-EN 1774-ZnAl4Cu1 or PA6 GFR 30
 SEAL : Polyurethane

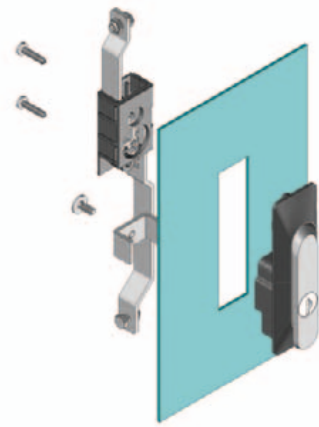

Outside of gasketing

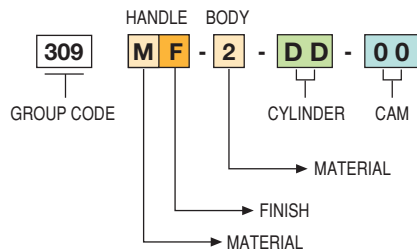

In case of 3 points application please use "CC" number for cam instead of "00".

| MATERIAL | M | FINISH | F |
|---------------------|---|--------------|---|
| Zamak | 1 | Chrome | 1 |
| | | Black Coated | 2 |
| Plastic (polyamide) | 2 | No Finish | 0 |

HIGH SECURITY CYLINDER

| | |
|-------------|--------------|
| Keyed alike | Keyed differ |
| 20 | 21 |

| Cylinder | SPECIFICATIONS | DD |
|----------|---|----|
| | Stainless steel dust cap (Keyed alike) | 03 |
| | Stainless steel dust cap (Keyed differ) | 32 |
| | Master System | 04 |
| | Euro key (5333) | 05 |

For cams please check page: 88

For rods please check page: 90 - 96