

108

SWING HANDLE



IP 65



LH/RH



RoHS


- Standard cut out .
- Ultra thin external profile, just 9 mm, to give flush appearance.
- Spring loaded handle , slam action .

APPLICATIONS

Electric panels, machinery covers, rack cabinets

MATERIAL

BODY : Polyamide DIN-EN ISO 1043-1 PA6 GFR 30
 HANDLE : Zamak DIN-EN 1774-ZnAl4Cu1
 CAM : Steel or PA6 GFR 30
 SEAL : Polyurethane

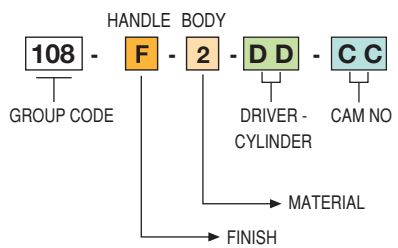

MATERIAL	M
Plastic (polyamide)	2

FINISH	F
Chrome	1
Black Coated	2

HIGH SECURITY CYLINDER	
Keyed alike	Keyed differ
20	21

DRIVERS		
5 mm Double bit	8 mm Square	9 mm Triangular
15	28	39

Cylinder	SPECIFICATIONS	DD
	Stainless steel dust cap (Keyed alike)	03
	Stainless steel dust cap (Keyed differ)	32
	Master System	04
	Euro key (5333)	05

- For cams please check page: 86- 87
- For rods please check page: 90 - 96
- For keys please check page: 98 - 99